


CERNIERA Serie CFG 570

HINGE Code CFG 570



-  Apertura universale DX/SX
Universal RX/LX
-  180° Angolo di Apertura
Opening Angle
-  Regolabile X, Y, Z
Adjustable X, Y, Z

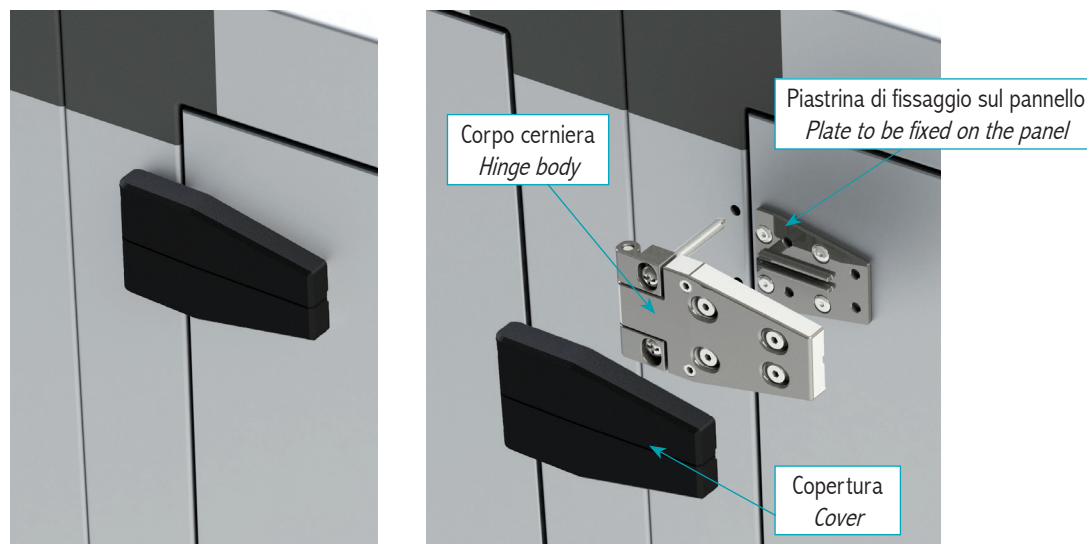

La cerniera regolabile CFG570 è stata progettata specificatamente per porte isolate. Consente:

- Il montaggio agevole e veloce con riduzione dei tempi di montaggio
- La regolazione sugli assi X, Y e Z, quindi anche della compressione sulla guarnizione
- La copertura delle viti con riduzione dell'eventuale ossidazione

The adjustable hinge CFG570 was specifically designed for insulated doors. Feature are:


- *Easy and faster mounting with reduction of assembly time*
- *Adjustment in X, Y and Z-axis, also for the gasket compression*
- *Screws cover with reduction of oxidation effects*




Enginia Srl

Viale Lombardia, 78 - 20056 Trezzo sull'Adda (MI) - Italy
tel. +39 02.95749357 - fax +39 02.95749365
commerciale@enginiasrl.com - **www.enginiasrl.com**


CERNIERA Serie CFG 570
HINGE Code CFG 570

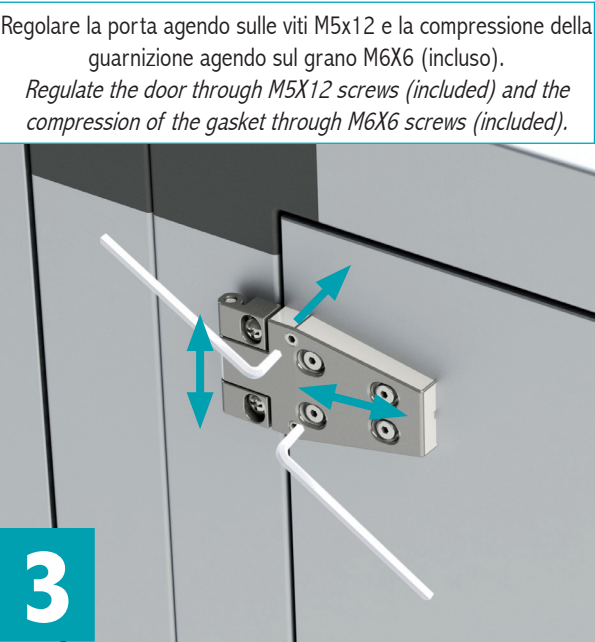

DIMENSIONI CFG570-001
CFG570-001 Dimensions

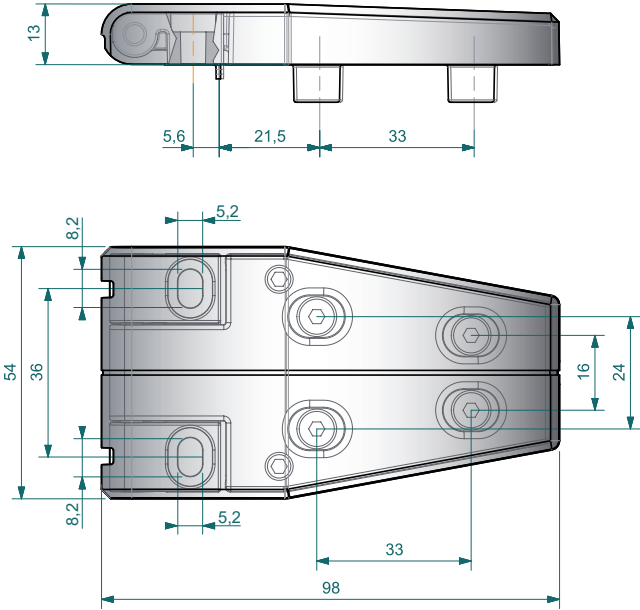

FORATURE
Drilling

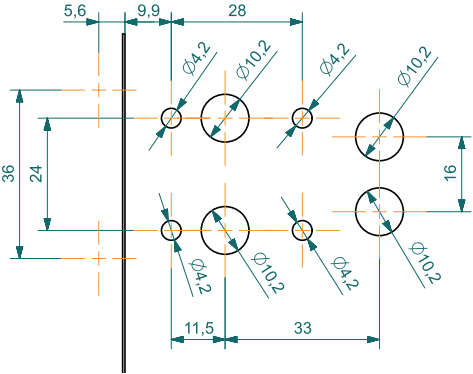

Profilo
Profile

Pannello
Panel

Codice/Code	Regolazione Regulation	Materiale Material	Fissaggio* Fixed with*	Pcs Box
CFG570.000	Altezza/ Height → 7mm Larghezza/ Width → 3mm Profondità/ Depth → 1mm	Zama con perno in acciaio zincato Cover in ABS Vite M5x12/Grano M6X6 - Acciaio Zincato Zink Die-cast with pin in galvanized steel ABS Cover Screw M5x12/Grub screw M6x6 - Galvanized steel	Piastrina: rivetto Ø 4mm Cerniera: viti M5x12 (incluse) rivetti Ø 5mm viti autofilettanti Ø 4,8mm Plate: rivet Ø 4mm Hinge: screws M5x12 (included) rivets Ø 5mm self tapping screws Ø 4,8mm	50

* Non incluso - *Not included*