


CERNIERA/MANIGLIA Serie DUAL HINGE/HANDLE Code DUAL



Come si può capire dalle immagini qui riportate, l'innovativo principio di funzionamento delle cerniere "DUAL" consente di ottenere porte che si aprono indifferentemente a destra o a sinistra, o che possono essere completamente rimosse, facilitando così il compito dei progettisti. Di fatto, il concetto di avere elementi diversi, cerniere e maniglie, è completamente superato dall'utilizzo di quattro elementi identici, consentendo un dimezzamento dei codici di magazzino e una procedura di foratura e installazione degli elementi sempre uguale.




As the pictures show, the breakthrough technology incorporated into the newly designed "DUAL" hinge allows any door to open from the left, from the right, or be completely removed altogether thus making it much easier on engineering design. This new system greatly reduces inventory and availability requirements as well as the pre-drilling and installation procedures.

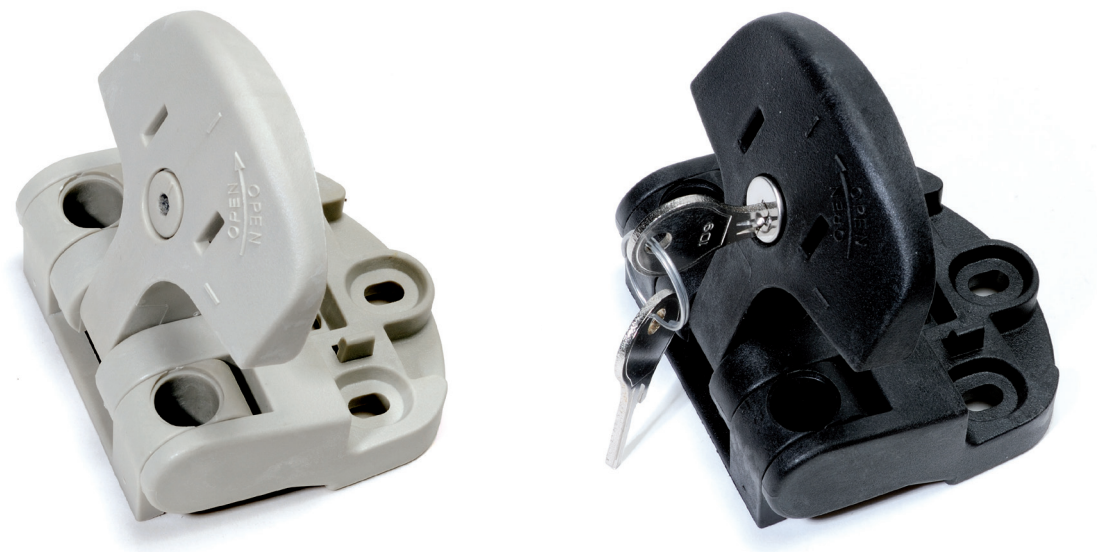

Enginia Srl




Viale Lombardia, 78 - 20056 Trezzo sull'Adda (MI) - Italy
tel. +39 02.95749357 - fax +39 02.95749365
commerciale@enginiasrl.com - **www.enginiasrl.com**

Rimozione Pannello/Panel Removing

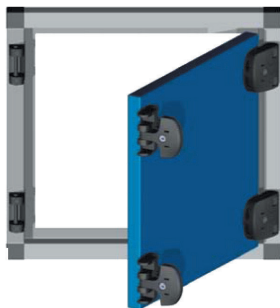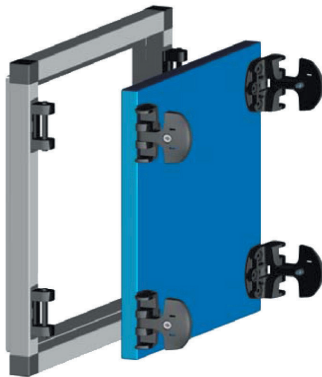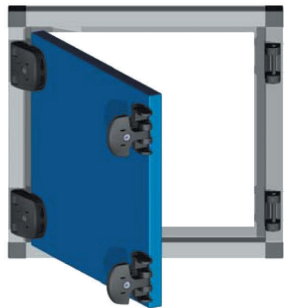

Apertura a Destra/Right Opening

Apertura a Sinistra/Left Opening

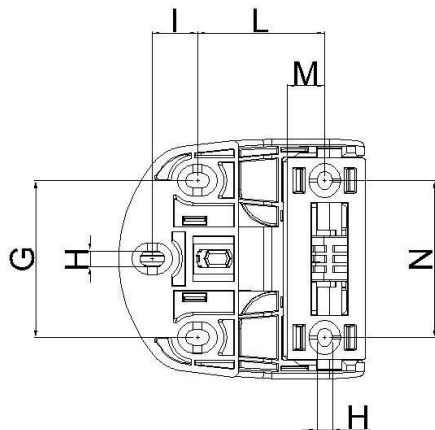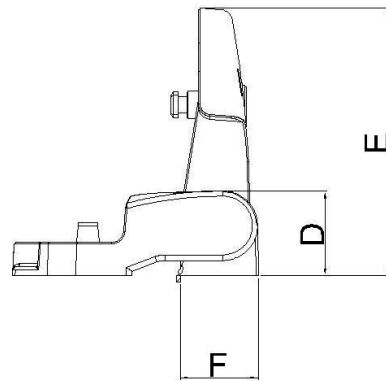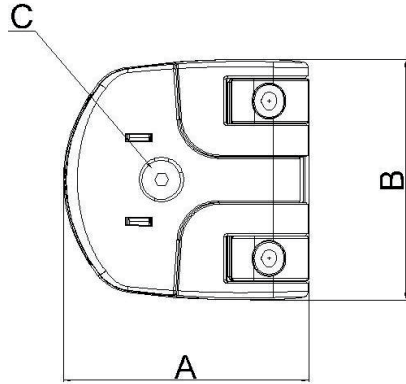

Codice/Code	Colore/Colour	C	Materiale/Material	Peso gr./ Weight lb.	Modulo elastico/ Elasticity modulus	mm. / inches											Pcs/Box
						A	B	D	E	F	G	H	I	L	M	N	
DUAL. 01B01	Nero/Black	Esagonale/ Exagonal 4 mm.	Nylon+ Fibra di vetro/Nylon + Fiberglass PA6 F.V.50%	114/ 0.251	1200 N/m ²	81 / 3.18	79 / 3.11	28 / 1.10	88 / 3.46	26 / 1.02	52 / 2.04	5,5 / 0.21	15 / 0.59	42 / 1.65	12,5 / 0.49	52 / 2.04	50
DUAL. 01B02	Nero/Black	Chiave/Key	Nylon+ Fibra di vetro/Nylon + Fiberglass PA6 F.V.50%	114/ 0.251	1200 N/m ²	81 / 3.18	79 / 3.11	28 / 1.10	88 / 3.46	26 / 1.02	52 / 2.04	5,5 / 0.21	15 / 0.59	42 / 1.65	12,5 / 0.49	52 / 2.04	
DUAL. 01G01	Grigio/Grey RAL 7035	Esagonale/ Exagonal 4 mm.	Nylon+ Fibra di vetro/Nylon + Fiberglass PA6 F.V.50%	114/ 0.251	1200 N/m ²	81 / 3.18	79 / 3.11	28 / 1.10	88 / 3.46	26 / 1.02	52 / 2.04	5,5 / 0.21	15 / 0.59	42 / 1.65	12,5 / 0.49	52 / 2.04	
DUAL. 01G02	Grigio/Grey RAL 7035	Chiave/Key	Nylon+ Fibra di vetro/Nylon + Fiberglass PA6 F.V.50%	114/ 0.251	1200 N/m ²	81 / 3.18	79 / 3.11	28 / 1.10	88 / 3.46	26 / 1.02	52 / 2.04	5,5 / 0.21	15 / 0.59	42 / 1.65	12,5 / 0.49	52 / 2.04	
DUAL. 02B01	Nero/Black	Esagonale/ Exagonal 4 mm.	Nylon+ Fibra di vetro/Nylon + Fiberglass PA6 F.V.50%	162/ 0.357 lb	1200 N/m ²	90 / 3.54	98 / 3.85	30 / 1.18	98 / 3.85	28,5 / 1.12	71,5 / 2.81	5,5 / 0.21	15 / 0.59	46 / 1.81	14 / 0.55	64 / 2.51	
DUAL. 02B02	Nero/Black	Chiave/Key	Nylon+ Fibra di vetro/Nylon + Fiberglass PA6 F.V.50%	162/ 0.357 lb	1200 N/m ²	90 / 3.54	98 / 3.85	30 / 1.18	98 / 3.85	28,5 / 1.12	71,5 / 2.81	5,5 / 0.21	15 / 0.59	46 / 1.81	14 / 0.55	64 / 2.51	
DUAL. 02G01	Grigio/Grey RAL 7035	Esagonale/ Exagonal 4 mm.	Nylon+ Fibra di vetro/Nylon + Fiberglass PA6 F.V.50%	162/ 0.357 lb	1200 N/m ²	90 / 3.54	98 / 3.85	30 / 1.18	98 / 3.85	28,5 / 1.12	71,5 / 2.81	5,5 / 0.21	15 / 0.59	46 / 1.81	14 / 0.55	64 / 2.51	
DUAL. 02G02	Grigio/Grey RAL 7035	Chiave/Key	Nylon+ Fibra di vetro/Nylon + Fiberglass PA6 F.V.50%	162/ 0.357 lb	1200 N/m ²	90 / 3.54	98 / 3.85	30 / 1.18	98 / 3.85	28,5 / 1.12	71,5 / 2.81	5,5 / 0.21	15 / 0.59	46 / 1.81	14 / 0.55	64 / 2.51	